

FORM PTO-1390
(REV. 9-2001)

DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

Mo-6843/LeA 33,555

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

10/018332
To Be Assigned

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/EP00/05167

06 June 2000 (6.06.00)

19 June 1999 (19.06.99)

TITLE OF INVENTION

HIGH-RESILIENT POLYURETHANE FOAMS PRODUCED FROM POLYETHER POLYOLS

APPLICANT(S) FOR DO/EO/US HOFMANN, Jorg; GUPTA, Pramod; DIETRICH, Manfred; RABE, Hansjorgen; GRONEN, Jurgen and OOMS, Pieter

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:

Abstract

Form PTO 1449 w/references

Drawings (3 sheets)

U.S. APPLICATION NO. (if known, see 37 CFR 1.21)

INTERNATIONAL APPLICATION NO.

To Be Assigned

10100332

PCT/EP00/05167

ATTORNEY'S DOCKET NUMBER

Mo-6843/LeA 33,555

21. ☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1040.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

\$ 890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	8 - 20 =	0	x \$18.00	\$ 0.00
Independent claims	2 - 3 =	0	x \$84.00	\$ 0.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$ 0.00

TOTAL OF ABOVE CALCULATIONS =

\$ 890.00

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.

\$ 0.00

SUBTOTAL =

\$ 890.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0.00

TOTAL NATIONAL FEE =

\$ 890.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 40.00

TOTAL FEES ENCLOSED =

\$ 930.00

Amount to be refunded: \$

charged: \$

- a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 13-3848 in the amount of \$ 930.00 to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 13-3848. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO



00157

PATENT TRADEMARK OFFICE

Lyndanne M. Whalen
SIGNATURE

Lyndanne M. Whalen

NAME

29,457

REGISTRATION NUMBER

10/018332

APR 13 2001

PATENT APPLICATION

Mo-6843

LeA 33,555

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION OF)
JÖRG HOFMANN ET AL) PCT/EP 00/05167
SERIAL NUMBER: TO BE ASSIGNED)
FILED: HEREWITH)
TITLE: HIGH RESILIENT POLYURETHANE)
FOAMS PRODUCED FROM POLY-)
ETHER POLYOLS)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents

Washington, D.C. 20231

Sir:

Upon granting the enclosed application a Serial Number and filing date,
please amend the application as follows:

"Express Mail" mailing label number ET700176236US

Date of Deposit December 13, 2001

I hereby certify that this paper or fee is being deposited with the United States
Postal Service "Express Mail Post Office to Addressee" service under 37 CFR
1.10 on the date indicated above and is addressed to the Assistant Commissioner
of Patents and Trademarks, ~~Washington, D.C. 20231~~ Arlington, Va

Donna J. Veatch

(Name of person mailing paper or fee)

Donna J. Veatch
Signature of person mailing paper or fee)

IN THE TITLE:

At page 1, line 1, please delete the Title and substitute therefor - -HIGH-RESILIENT POLYURETHANE FOAMS PRODUCED FROM POLYETHER POLYOLS- -.

IN THE SPECIFICATION:

At page 1, line 3, please insert - -BACKGROUND OF THE INVENTION- -.

At page 3, line 9, please insert - -SUMMARY OF THE INVENTION- -.

At page 3, line 23, please insert - -BRIEF DESCRIPTION OF THE

DRAWINGS

Figure 1 illustrates the apparatus used to determine the air permeability of the foam produced in Example 12.

Figure 2 illustrates in detail the glass flow vessel of the apparatus shown in Figure 1.

Figure 3 illustrates in detail the measuring head of the apparatus shown in Figure 1.

DETAILED DESCRIPTION OF THE INVENTION- -.

IN THE CLAIMS:

Please cancel Claims 1-10 and add the following new Claims 11- 18:

- - 11. A flexible polyurethane foam which is the reaction product of

(1) a polyisocyanate

with

(2) an isocyanate-reactive component comprising a polyether polyol produced by alkoxylation in the presence of a double metal cyanide catalyst containing at least one ethylene oxide/propylene oxide mixed block and having a number average molecular weight of from 700 to 50,000 g/mole.

12. The foam of Claim 11 in which the polyether polyol contains a terminal propylene oxide block.

13. The foam of Claim 12 which is a hot cured molded foam.

14. The foam of Claim 12 which is a slabstock foam.

15. The foam of Claim 14 in which at least 50 mole% of the ethylene oxide/propylene oxide mixed block of the polyether polyol comprises polyoxypropylene units.

16. The foam of Claim 11 in which the polyether polyol has a terminal ethylene oxide/propylene oxide mixed block and more than 40 mole% primary hydroxyl groups.

17. The foam of Claim 16 which is a cold-cured molded foam.

18. A process for the production of flexible polyurethane foams comprising reacting

(a) a polyisocyanate

with

(b) an isocyanate-reactive component comprising a polyether polyol produced by alkoxylation in the presence of a double metal cyanide catalyst having at least one ethylene oxide/propylene oxide mixed block and a number average molecular weight of from 700 to 50,000 g/mole.- -

IN THE ABSTRACT

At page 28, line 1, please delete the Title and substitute therefor - -HIGH-RESILIENT POLYURETHANE FOAMS PRODUCED FROM POLYETHER POLYOLS- -.

Please delete the text of the present Abstract and replace with:

--Flexible polyurethane foams are produced from a polyisocyanate and a polyether polyol which has been alkoxyated in the presence of a double metal cyanide catalyst and that has at least one ethylene oxide-propylene oxide mixed block. --

REMARKS

The Title has been amended at page 1 and on the Abstract page (page 28) to make it consistent with the Title given on the Declaration and Assignment signed by the inventors.

The specification has been amended at pages 1 and 3 to insert the headings "BACKGROUND OF THE INVENTION", "SUMMARY OF THE INVENTION", "BRIEF DESCRIPTION OF THE DRAWINGS" AND "DETAILED DESCRIPTION OF THE INVENTION".

The specification has also been amended at page 3 to insert a brief description of Figures 1-3. Support for these descriptions is found at page 24, lines 1-3 of the specification and in the Figures.

Claims 1-10 have been cancelled.

New Claim 11 corresponds substantially to original Claim 1.

New Claim 12 corresponds substantially to original Claim 2.

New Claim 13 corresponds substantially to original Claim 3.

New Claim 14 corresponds substantially to original Claim 4.

New Claim 15 corresponds substantially to original Claim 5.

New Claim 16 corresponds substantially to original Claim 6.

New Claim 17 corresponds substantially to original Claim 7.


New Claim 18 corresponds substantially to original Claim 9.

The Abstract has been rewritten to place it in better form. A new Abstract page is enclosed.

Entry of this Amendment and an action on the merits of this case are respectfully requested.

Respectfully submitted,

Bayer Corporation
100 Bayer Road
Pittsburgh, PA 15205-9741
412-777-8347
FACSIMILE PHONE NUMBER:
(412) 777-8363
s:\kgb\lmw2224pa

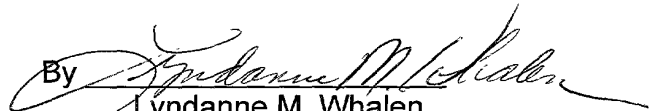By 
Lyndanne M. Whalen
Attorney for Applicants
Reg. No. 29,457

Marked up version reflecting changes to specification

IN THE TITLE:

At page 1, line 1, please delete the Title and substitute therefor - -HIGH-RESILIENT POLYURETHANE FOAMS PRODUCED FROM POLYETHER POLYOLS- -.

IN THE SPECIFICATION:

At page 1, line 3, please insert - -BACKGROUND OF THE INVENTION- -.

At page 3, line 9, please insert - -SUMMARY OF THE INVENTION- -.

At page 3, line 23, please insert - -BRIEF DESCRIPTION OF THE

DRAWINGS

Figure 1 illustrates the apparatus used to determine the air permeability of the foam produced in Example 12.

Figure 2 illustrates in detail the glass flow vessel of the apparatus shown in Figure 1.

Figure 3 illustrates in detail the measuring head of the apparatus shown in Figure 1.

DETAILED DESCRIPTION OF THE INVENTION- -.

IN THE CLAIMS:

Please cancel Claims 1-10 and add the following new Claims 11- 22:

- - 11. A flexible polyurethane foam which is the reaction product of

(1) a polyisocyanate

with

(2) an isocyanate-reactive component comprising a polyether polyol produced by alkoxylation in the presence of a double metal cyanide catalyst containing at least one ethylene oxide/propylene oxide mixed block and having a number average molecular weight of from 700 to 50,000 g/mole.

12. The foam of Claim 11 in which the polyether polyol contains a terminal propylene oxide block.

13. The foam of Claim 12 which is a hot cured molded foam.

14. The foam of Claim 12 which is a slabstock foam.
15. The foam of Claim 14 in which at least 50 mole% of the ethylene oxide/propylene oxide mixed block of the polyether polyol comprises polyoxypropylene units.
16. The foam of Claim 11 in which the polyether polyol has a terminal ethylene oxide/propylene oxide mixed block and more than 40 mole% primary hydroxyl groups.
17. The foam of Claim 16 which is a cold-cured molded foam.
18. A process for the production of flexible polyurethane foams comprising reacting
- (a) a polyisocyanate
- with
- (b) an isocyanate-reactive component comprising a polyether polyol produced by alkoxylation in the presence of a double metal cyanide catalyst having at least one ethylene oxide/propylene oxide mixed block and a number average molecular weight of from 700 to 50,000 g/mole.- -

IN THE ABSTRACT

At page 28, line 1, please delete the Title and substitute therefor - -HIGH - RESILIENT POLYURETHANE FOAMS PRODUCED FROM POLYETHER POLYOLS- -.

Please delete the text of the present Abstract and replace with:

[The invention relates to flexible] Flexible polyurethane foams [that have been] are produced from a polyisocyanate[s] and a polyether polyol[s] which has been alkoxyated in the presence of a double metal cyanide catalyst[s] and that has [have] at least one ethylene oxide-propylene oxide mixed block[, as well as a process for their production].

HIGH RESILIENT POLYURETHANE FOAMS PRODUCED
FROM POLYETHER POLYOLS

ABSTRACT OF THE DISCLOSURE

Flexible polyurethane foams are produced from a polyisocyanate and a polyether polyol which has been alkoxyated in the presence of a double metal cyanide catalyst and that has at least one ethylene oxide-propylene oxide mixed block.

10/018332

10/018332

3/prb

- 1 -

JC18 Rec'd PCT/FTC 13 DEC 2001

Flexible polyurethane foams produced from polyether polyols

The invention relates to flexible polyurethane foams that have been produced from polyisocyanates and polyether polyols in the presence of double metal cyanide (DMC) catalysts and that have at least one ethylene oxide-propylene oxide mixed block, as well as a process for their production.

The expression flexible polyurethane foams denotes foams that exert a small resistance to a pressure stress and that are open-cell, air-permeable and that can be reversibly deformed. The properties of flexible polyurethane foams substantially depend on the structure of the polyether polyols, polyisocyanates and additives such as catalysts and stabilisers that are used in their production. As regards the polyethers, the functionality, chain length as well as the epoxides used and the resultant reactivity of the hydroxyl groups have the greatest influence on the characteristics of the foam.

The production of polyether polyols is mostly carried out by base-catalysed polyaddition of alkylene oxides to polyfunctional starter compounds such as for example alcohols, acids, amines, etc. (see for example Gum, Riese & Ulrich (Editors): "Reaction Polymers", Hanser Verlag, Munich 1992, pp. 75-96). After completion of the polyaddition the catalyst is removed from the polyether polyol in a very complicated process, for example by neutralisation, distillation and filtration. The long-chain polyethers have to be freed particularly carefully from catalyst residues since otherwise undesirable secondary reactions, such as for example the formation of polyisocyanurates, may take place during the foaming. The residual content of potassium and sodium ions in the polyether polyol amounts to only a few ppm. Only polyether polyols with a very low alkali metal content are suitable for the production of polyurethane elastomers and flexible polyurethane foams. The polyether polyols produced by base catalysis also have the disadvantage that with increasing chain length, the content of monofunctional polyethers (so-called monools) constantly increases and the functionality decreases.

"Express Mail" mailing label number ET700176236UCDate of Deposit December 13, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231

Donna J. Veatch

(Name of person mailing paper or fee)

Donna J. Veatch

10018332-124001

In order to circumvent the aforementioned disadvantage, it is recommended in the field of polyurethane elastomers to employ polyether polyols that are produced by using double metal cyanide (DMC) catalysts, and that accordingly have very low contents of allyl ethers (monools) and thus exhibit a higher functionality. Such
5 production processes have been known since the 1960s (US-A 3 427 256, US-A 3 427 334, US-A 3 427 335). The disadvantage of this production method is however the very complicated and expensive removal of the catalysts.

In more recent patent applications (for example EP-A 700 949, EP-A 761 708, WO
10 97/40086, WO 98/16310, DE-A 19 745 120, DE-A 19 757 574, DE-A 198 102 269) highly active improved DMC catalysts are described, which on account of their very high activity can be used in such small amounts (catalyst concentration ≤ 50 ppm) that a separation of the catalyst from the polyether polyol is no longer necessary. In this way a more economic production of the polyether polyols is possible compared
15 to the conventional base-catalysed process. These products may be used directly for the production of polyurethane elastomers.

The disadvantage however is that conventional, low molecular weight starter compounds such as for example propylene glycol, glycerol and trimethylolpropane
20 cannot in general be alkoxylated with DMC catalysts. The DMC catalysts therefore in general require the use of oligomeric propoxylated starter compounds that are obtained beforehand from the aforementioned low molecular weight starters, for example by conventional alkali catalysis (generally with KOH), followed by complicated working-up, by for example neutralisation, distillation and filtration.

25 German patent application 198 17 676.7 describes a process for the production of long-chain polyether polyols that is completely free of any working-up stage, in which first of all the pre-propoxylated starter compounds are obtained by catalysis with perfluoroalkyl sulfonates (preferably triflates) of metals of Group III A of the
30 Periodic System of the Elements (corresponding to the 1970 IUPAC Convention), which are then converted without separation of the catalyst and working-up, by means of highly active DMC catalysts into long-chain, high molecular weight

polyether polyols. An extremely economical production of long-chain polyether polyols is possible in this way.

The disadvantage however is that poly(oxypropylene)polyols that can be produced
5 very economically by these highly active DMC catalysts without any separation of
the DMC catalyst are not suitable for the production of flexible polyurethane foams.
The use of such polyether polyols in flexible foam formulations leads to serious
crack formation.

10 It has now been found that polyether polyols that are outstandingly suitable for the
production of flexible polyurethane foams are obtained by the DMC-catalysed
incorporation of ethylene oxide/propylene oxide mixed blocks. The mixed blocks
are either added directly to the pre-propoxylated starter compounds up to the end of
the chain, or are added only after a propylene oxide block. In both cases a terminal
15 propylene oxide block can also be added.

Such polyether polyols may also be used without the co-use of filler-containing
polyols such as for example polymer polyols (styrene-acrylonitrile copolymers) or
polyurea dispersion polyols, etc., and without modified polyisocyanates such as for
20 example allophanate polyisocyanates, biuret polyisocyanates, for the production of
flexible polyurethane foams. Traces of catalyst do not in this case exert any
negative influence.

The invention accordingly provides flexible polyurethane foams of polyisocyanates
25 and long-chain polyether polyols that are produced by DMC catalysis without
separation of the catalyst, that have at least one ethylene oxide/propylene oxide
mixed block, and that also have a number average molecular weight between 700
and 15,000 g/mole, as well as a process for their production.

30 Suitable as polyisocyanates are aliphatic, cycloaliphatic, araliphatic, aromatic and
heterocyclic polyisocyanates, such as are described in Justus Liebigs Annalen der
Chemie 562 (1949) 75, for example those of the formula



in which

5 n is an integer from 2 to 4, preferably 2, and

Q denotes an aliphatic hydrocarbon radical with 2 to 18, preferably 6 to 10 C
atoms, a cycloaliphatic hydrocarbon radical with 4 to 15, preferably 5 to 10
C atoms, an aromatic hydrocarbon radical with 6 to 15, preferably 6 to 13 C
10 atoms, or an araliphatic hydrocarbon radical with 8 to 15, preferably 8 to 13
C atoms.

Preferred are polyisocyanates such as are described in DE-OS 2 832 253. As a rule
it is particularly preferred to use the technically easily accessible polyisocyanates,
15 for example 2,4-toluylene diisocyanate and 2,6-toluylene diisocyanate as well as
arbitrary mixtures of these isomers ("TDI"), polyphenyl-polymethylene
polyisocyanates, such as are produced by aniline-formaldehyde condensation
followed by phosgenation ("crude MDI") and polyisocyanates containing
carbodiimide groups, urethane groups, allophanate groups, isocyanurate groups, urea
20 groups or biuret groups ("modified polyisocyanates"), in particular those modified
polyisocyanates that are derived from 2,4-toluylene diisocyanate and/or 2,6-
toluylene diisocyanate or from 4,4'-diphenylmethane diisocyanate and/or 2,4'-
diphenylmethane diisocyanate.

25 The production of the long-chain polyether polyols that are used in the process
according to the invention is carried out by means of DMC-catalysed polyaddition
of alkylene oxides to starter compounds containing active hydrogen atoms.

Suitable DMC catalysts are in principle known and are described in detail in the
30 prior art listed above. There are preferably used improved, highly active DMC
catalysts that are described for example in EP-A 700 949, EP-A 761 708, WO
97/40086, WO 98/16310, DE-A 197 45 120, DE-A 197 57 574 and DE-A 198 102
269. A typical example are the highly active DMC catalysts described in EP-A 700

949 that contain, in addition to a double metal cyanide compound (for example zinc hexacyanocobaltate(III)) and an organic complex ligand (for example tert.-butanol), also a polyether with a number average molecular weight of greater than 500 g/mole.

5

As starter compounds with active hydrogen atoms there are preferably used compounds with (number average) molecular weights of 18 to 2,000 g/mole and with 1 to 8 hydroxyl groups. By way of example there may be mentioned butanol, ethylene glycol, diethylene glycol, triethylene glycol, 1,2-propylene glycol, 1,4-
10 butanediol, 1,6-hexanediol, bisphenol A, trimethylolpropane, glycerol, pentaerythritol, sorbitol, cane sugar, degraded starch or water.

15

It is more advantageous to use those starter compounds with active hydrogen atoms that have been produced beforehand from the aforementioned low molecular weight starter compounds and that form oligomeric alkoxylation products with (number
average) molecular weights of 200 to 2,000 g/mole. Preferably oligomeric propoxylated starter compounds are used having 1 to 8 hydroxyl groups, particularly preferably 2 to 6 hydroxyl groups, and (number average) molecular weights of 200
to 2,000 g/mole.

20

The production of these oligomeric propoxylated starter compounds from the low molecular weight starters may be carried out for example by conventional alkali catalysis (e.g. with KOH) followed by working-up by for example neutralisation, distillation and filtration, or as described in German patent application 198 17 676.7
25 by catalysis with perfluoroalkyl sulfonates of metals of Group III A of the Periodic System of the Elements (corresponding to the 1970 IUPAC Convention), without subsequent separation of the catalyst.

30

The further alkoxylation is then carried out with highly active DMC catalysts. According to the invention the pre-propoxylated starter compound is converted by means of DMC catalysis either with an EO/PO mixed block in a weight ratio of 2/98 to 90/10, or is further propoxylated and then reacted either with an EO/PO mixed block in a weight ratio of 2/98 to 90/10, or is first of all reacted with an EO/PO

mixed block in a weight ratio of 2/98 to 90/10 and at the end is reacted once more with a PO block, or is further propoxylated and then reacted with an EO/PO mixed block in a weight ratio of 2/98 to 90/10 and at the end is reacted once more with a PO block.

5

The DMC-catalysed alkoxylation is generally carried out at temperatures of 20 to 200°C, preferably in the range from 40 to 180°C, particularly preferably at temperatures of 50 to 150°C. The reaction may be carried out at total pressures of 0.001 to 20 bar. The polyaddition may be carried out in bulk or in an inert, organic solvent such as toluene and/or THF. The amount of solvent is normally 10 to 30 wt.% referred to the amount of the polyether polyol to be produced. The polyaddition may be carried out continuously or batchwise, for example in a batch or in a semi-batch process.

10

15 The weight ratios of the EO/PO mixed blocks to be reacted is 2/98 to 90/10, preferably 5/95 to 80/20. The length of the EO/PO mixed blocks as well as of the pure PO blocks that are built up by means of DMC catalysis is in each case 1 to 1,000 alkylene oxide units, preferably 2 to 500 alkylene oxide units, and particularly preferably 3 to 200 alkylene oxide units.

20

If the polyether polyols produced by DMC catalysis have a terminal EO/PO mixed block, then these are preferably produced with an ethylene oxide/propylene oxide mixture in an EO:PO weight ratio of 40:60 to 95:5, preferably 50:50 to 90:10, particularly preferably 60:40 to 90:10. In such polyether polyols the proportion of primary OH groups is preferably 40 to 95 mole %, particularly preferably 50 to 90 mole %; the total content of oxyethylene units in the polyether polyol is preferably > 25 wt.%, particularly preferably > 30 wt.%, most particularly preferably > 35 wt.%.

25

The number average molecular weights of the long-chain polyether polyols that are used according to the invention for the production of flexible polyurethane foams are 700 to 50,000 g/mole, preferably 1,000 to 30,000 g/mole, and particularly preferably 1,500 to 20,000 g/mole.

30

The concentration of the highly active DMC catalysts is 5 to 100 ppm, preferably 10 to 75 ppm and particularly preferably 15 to 50 ppm, referred to the amount of the polyether polyol to be produced. On account of the very low catalyst concentration the polyether polyols may be used without separation of the catalyst for the production of flexible polyurethane foams without the product qualities being adversely affected.

In addition to the aforescribed long-chain polyether polyols produced by DMC catalysis without separation of the catalyst, further compounds containing hydroxyl groups (polyols) may be used in the polyol formulation for the production of the flexible polyurethane foams according to the invention. These polyols known *per se* are described in detail for example in Gum, Riese & Ulrich (Editors): "Reaction Polymers", Hanser Verlag, Munich 1992, pp. 66-96, and G. Oertel (Editor): "Kunststoffhandbuch, Vol. 7, Polyurethanes", Hanser Verlag, Munich 1993, pp. 57-75. Examples of suitable polyols may be found in the aforementioned literature citations as well as in US-A 3 652 639, US-A 4 421 872 and US-A 4 310 632.

Preferably used polyols are polyether polyols (in particular poly(oxyalkylene)polyols) and polyester polyols.

The production of the polyether polyols is carried out according to known methods, preferably by base-catalysed polyaddition of alkylene oxides to polyfunctional starter compounds containing active hydrogen atoms, such as for example alcohols or amines. The following may be mentioned by way of example: ethylene glycol, diethylene glycol, 1,2-propylene glycol, 1,4-butanediol, hexamethylene glycol, bisphenol A, trimethylolpropane, glycerol, pentaerythritol, sorbitol, cane sugar, degraded starch, water, methylamine, ethylamine, propylamine, butylamine, aniline, benzylamine, o- and p-toluidine, α , β -naphthylamine, ammonia, ethylenediamine, propylenediamine, 1,4-butylenediamine, 1,2-, 1,3-, 1,4-, 1,5-, and/or 1,6-hexamethylenediamine, o-, m-, and p-phenylenediamine, 2,4-, 2,6-toluylenediamine, 2,2'-, 2,4- and 4,4'-diaminodiphenylmethane and diethylenediamine.

As alkylene oxides there are preferably used ethylene oxide, propylene oxide, butylene oxide as well as their mixtures. The build-up of the polyether chains by alkoxylation may be carried out not only with one monomeric epoxide, but also statistically or also blockwise with two or three different monomeric epoxides.

5

Processes for the production of such polyether polyols are described in "Kunststoffhandbuch, Vol. 7, Polyurethanes", in "Reaction Polymers" as well as for example in US-A 1 922 451, US-A 2 674 619, US-A 1 922 459, US-A 3 190 927 and US-A 3 346 557.

10

Methods for the production of polyester polyols are also well known and are described for example in the two aforementioned literature citations ("Kunststoffhandbuch, Vol. 7, Polyurethanes", and "Reaction Polymers"). The polyester polyols are produced *inter alia* by polycondensation of polyfunctional carboxylic acids or their derivatives, such as for example acid chlorides or anhydrides, with polyfunctional hydroxyl compounds.

15

20

As polyfunctional carboxylic acids there may for example be used: adipic acid, phthalic acid, isophthalic acid, terephthalic acid, oxalic acid, succinic acid, glutaric acid, azelaic acid, sebacic acid, fumaric acid or maleic acid.

25

As polyfunctional hydroxyl compounds there may for example be used: ethylene glycol, diethylene glycol, triethylene glycol, 1,2-propylene glycol, dipropylene glycol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, 1,12-dodecanediol, neopentyl glycol, trimethylolpropane, triethylolpropane or glycerol.

30

The production of the polyester polyols may furthermore also be carried out by ring-opening polymerisation of lactones (e.g. caprolactone) with diols and/or triols as starters.

In addition a crosslinking component may be added in the production of the flexible polyurethane foams according to the invention. Crosslinking components that may be used are for example diethanolamine, triethanolamine, glycerol,

trimethylolpropane (TMP), adducts of such crosslinking compounds with ethylene oxide and/or propylene oxide with an OH number < 1,000, or also glycols with a number average molecular weight of $\leq 1,000$. Particularly preferred are triethanolamine, glycerol, TMP or low molecular weight EO and/or PO adducts thereof.

In addition auxiliary substances and additives and/or flame retardants known *per se* may also optionally be added as further components. In this connection auxiliary substances are understood to mean in particular catalysts and stabilisers known *per se*. Melamine may for example be used as flame retardant.

Catalysts that may optionally be added are known *per se*. By way of example there may be mentioned tertiary amines such as triethylamine, tributylamine, N-methylmorpholine, N-ethylmorpholine, N,N,N',N'-tetramethylethylenediamine, pentamethyldiethylenetriamine and higher homologues (DE-A 26 24 527 and DE-A 26 24 528), 1,4-diaza-bicyclo[2,2,2]octane, N-methyl-N'-dimethylaminoethyl-piperazine, bis(dimethylaminoalkyl)piperazines (DE-A 26 36 787), N,N-dimethylbenzylamine, N,N-dimethylcyclohexylamine, N,N-diethylbenzylamine, bis(N,N-diethylaminoethyl)adipate, N,N,N',N'-tetramethyl-1,3-butanediamine, N,N-dimethyl- β -phenylethylamine, 1,2-dimethylimidazole, 2-methylimidazole, monocyclic and bicyclic amidines (DE-A 17 20 633), bis(dialkylamino)alkyl ethers (US-A 3 330 782, DE-A 10 30 558, DE-A 18 04 361 and DE-A 26 18 280) as well as tertiary amines containing amide groups (preferably formamide groups) according to DE-A 25 23 633 and DE-A 27 32 292. Also suitable as catalysts are Mannich bases known *per se* formed from secondary amines, for example dimethylamine, and aldehydes, preferably formaldehyde, or ketones such as acetone, methyl ethyl ketone or cyclohexanone, and phenols such as phenol, nonyl phenol or bisphenols. Tertiary amines having hydrogen atoms active with respect to isocyanate groups and that may be used as catalyst are for example triethanolamine, triisopropanolamine, N-methyldiethanolamine, N-ethyldiethanolamine, N,N-dimethylethanolamine, their reaction products with alkylene oxides such as propylene oxide and/or ethylene oxide, as well as secondary-tertiary amines according to DE-A 27 32 292. Also suitable as catalysts are silaamines with carbon-silicon bonds, such as are described

for example in DE-A 12 29 290, for example 2,2,4-trimethyl-2-silamorpholine and 1,3-diethylaminomethyltetramethyldisiloxane. There may also be used as catalysts nitrogen-containing bases such as tetraalkylammonium hydroxides, as well as alkali metal hydroxides such as sodium hydroxide, alkali metal phenolates such as sodium phenolate, or alkali metal alcoholates such as sodium methylate. Hexahydrotriazines may also be used as catalyst (DE-A 17 69 043). The reaction between NCO groups and Zerewitinoff-active hydrogen atoms is also greatly accelerated by lactams and azalactams, an associate between the lactam and the compound containing acidic hydrogen first of all being formed. Such associates and their catalytic action are described in DE-A 20 62 286, DE-A 20 62 289, DE-A 21 17 576, DE-A 21 29 198, DE-A 23 30 175 and DE-A 23 30 211. According to the invention organometallic compounds, in particular organic tin compounds, may also be used as catalysts. As organic tin compounds there may be used, in addition to sulfur-containing compounds such as di-n-octyltin mercaptide (DE-A 17 69 367; US-A 3 645 927), preferably tin(II) salts of carboxylic acids such as tin(II)acetate, tin(II)octoate, tin(II)ethylhexanoate and tin(II)laurate, and tin(IV) compounds, for example dibutyltin oxide, dibutyltin dichloride, dibutyltin diacetate, dibutyltin dilaurate, dibutyltin maleate or dioctyltin diacetate. Obviously all of the aforementioned catalysts may be used in the form of mixtures. Of particular interest in this connection are combinations of organometallic compounds and amidines, aminopyridines or hydrazinopyridines (DE-A 24 34 185, DE-A 26 01 082 and DE-A 26 03 834). So-called polymeric catalysts such as are described in DE-A 42 18 840 may furthermore be used as catalysts. These catalysts are reaction products, present in the form of alkali metal salts, of trifunctional or higher functional alcohols with (number average) molecular weights of 92 to 1,000 with intramolar carboxylic acid anhydrides. The reaction products have (statistical average) at least 2, preferably 2 to 5 hydroxyl groups, and at least 0.5, preferably 1.0 to 4 carboxylate groups, the counterions to the carboxylate groups being alkali cations. The "reaction products" of the starting components may, as is evident from the content of carboxylate groups, also be mixtures of true reaction products with excess amounts of alcohols. Suitable polyhydric alcohols for the production of the reaction products are for example glycerol, trimethylolpropane, sorbitol, pentaerythritol, mixtures of such polyhydric alcohols, alkoxylation products of alcohols with (number average)

molecular weights of 92 to 1,000 of such polyhydric alcohols or of mixtures of such alcohols, wherein in the alkoxylation propylene oxide and/or ethylene oxide may be used in arbitrary sequence or as a mixture, though preferably exclusively propylene oxide is used. Suitable intramolecular carboxylic acid anhydrides for the production of the reaction product are for example maleic anhydride, phthalic anhydride, hexahydrophthalic anhydride, succinic anhydride, pyromellitic anhydride or arbitrary mixtures of such anhydrides. It is particularly preferred to use maleic anhydride. Further examples of catalysts that may be used as well as details of the mode of action of the catalysts are described in Vieweg und Höchtlen (Editors):
10 Kunststoff-Handbuch, Vol. VII, Carl-Hanser-Verlag, Munich 1966, pp. 96-102.

The catalysts are as a rule used in amounts of about 0.001 to 10 wt.%, referred to the total amount of compounds having at least two hydrogen atoms reactive with respect to isocyanates.

15 Further additives that may optionally be used are surface-active additives such as emulsifiers and foam stabilisers. Suitable emulsifiers are for example the sodium salts of castor oil sulfonates or salts of fatty acids with amines such as oleic acid diethylamine or stearic acid diethanolamine. Alkali metal salts or ammonium salts
20 of sulfonic acids, such as for example of dodecylbenzenesulfonic acid or dinaphthylmethanedisulfonic acid or of fatty acids such as castor oil acid or of polymeric fatty acids may also be co-used as surface-active additives.

As foam stabilisers there may be used in particular polyether siloxanes, especially
25 water-soluble examples. These compounds are generally synthesised in such a way that a copolymer of ethylene oxide and propylene oxide is joined to a polydimethylsiloxane radical. Such foam stabilisers are described for example in US-A 2 834 748, US-A 2 917 480 and US-A 3 629 308. Of particular interest are polysiloxane-polyoxyalkylene copolymers multiply branched via allophanate
30 groups, according to DE-A 25 58 523.

Further possible additives are reaction retardants, for example acid-reacting substances such as hydrochloric acid or organic acid halides, also cell regulators

known *per se* such as paraffins or fatty alcohols or dimethylpolysiloxanes, as well as pigments, dyes and flame retardants known *per se*, for example trichloroethyl phosphate, tricresyl phosphate or ammonium phosphate and ammonium polyphosphate, furthermore stabilisers against the effects of ageing and weathering, plasticisers, and fungistatic and bacteriostatic acting substances, and also fillers such as barium sulfate, diatomaceous earth, carbon black or precipitated chalk.

Further examples of surface-active additives and foam stabilisers that may optionally be co-used according to the invention, as well as cell regulators, reaction retardants, stabilisers, flame-inhibiting substances, plasticisers, dyes and fillers and also fungistatic and bacteriostatic acting substances, as well as details of the use and mode of action of these additives are described in Vieweg und Höchtlen (Editors): Kunststoff-Handbuch, Vol. VII, Carl-Hanser-Verlag, Munich 1966, pp. 103-113.

Blowing agent components that may optionally be used are all known blowing agents in polyurethane foam production. Suitable organic blowing agents include for example acetone, ethyl acetate, halogen-substituted alkanes such as methylene chloride, chloroform, ethylidene chloride, vinylidene chloride, monofluorotrichloromethane, chlorodifluoromethane, dichlorodifluoromethane, and also butane, hexane, heptane or diethylether, while suitable inorganic blowing agents are for example air, CO₂ or N₂O. A blowing action can also be achieved by adding compounds that decompose at temperatures above room temperature with the release of gases, for example nitrogen, examples of such compounds being azo compounds such as azo dicarbonamide or azo isobutyronitrile. Particularly preferred as blowing agents are hydrogen-containing fluoroalkanes (HCFCs) as well as lower alkanes such as for example butane, pentane, isopentane, cyclopentane, hexane, isohexane, optionally mixed with one another and/or with the addition of water. Further examples of blowing agents as well as details of their use are described in Vieweg und Höchtlen (Editors): Kunststoff-Handbuch, Vol. VII, Carl-Hanser Verlag, Munich 1966, pp. 108 et seq., pp. 453 et seq. and pp. 507 et seq. However, it is preferred to use water or CO₂ as the sole blowing agent.

In order to carry out the process according to the invention the reaction components are reacted according to the one-stage process known *per se*, the prepolymer process or the semi-prepolymer process, wherein mechanical equipment such as described in US-A 2 764 565 is preferably used. Details of processing equipment that may also
5 be used according to the invention are given in Vieweg und Höchtlen (Editors): Kunststoff-Handbuch, Vol. VII, Carl-Hanser-Verlag, Munich 1966, pp. 121 to 205.

In the production of the foam the foaming may also be carried out according to the invention in closed moulds. For this, the reaction mixture is added to a mould,
10 suitable mould materials being metals, for example aluminium, or plastics materials, for example epoxide resin. The foamable reaction mixture foams in the mould and forms the moulded article. The mould foaming may be carried out in such a way that the surface of the moulded part has a cellular structure. The foaming may however also be carried out so that the moulded part has a complete skin and a
15 cellular core. According to the invention, in this connection the foaming may be carried out in such a way that sufficient foamable reaction mixture is added to the mould so that the foam that is formed just fills the mould. Alternatively however, more foamable reaction mixture may be added to the mould than is necessary to fill the interior of the mould with foam. In the latter case the process is carried out
20 under so-called "overcharging" conditions; such a procedure is known for example from US-A 3 178 490 and US-A 3 182 104.

In the mould foaming process, in many cases "external release agents" known *per se*, such as silicone oils, are co-used. However, so-called "internal release agents"
25 may also be used, optionally mixed with external release agents, as is disclosed for example in DE-OS 21 21 670 and DE-OS 23 07 589.

Obviously, foamed materials may however also be produced by block foaming or by the double conveyor belt process known *per se* (see "Kunststoffhandbuch", Vol.
30 VII, Carl Hanser Verlag, Munich, Vienna, 3rd Edition 1993, p. 148).

The foamed materials may be produced by various processes used in the production of block foams, but also in moulds. In the production of block foams, in a preferred

embodiment of the invention polyether polyols are used that contain EO/PO mixed blocks with a PO proportion of at least 50 mole %, preferably at least 60 mole %; in addition they may also contain terminal PO blocks. If very flexible foams are to be produced, then polyether polyols are used that contain EO/PO mixed blocks with a large proportion of oxyethylene units; preferably these polyols also have a large proportion of primary OH groups (preferably at least 40 mole %, particularly preferably at least 50 mole %). In this connection these polyether polyols may be used in combination with conventionally produced polyols containing a large proportion of primary OH groups. In order to produce hot-cured moulded foams polyether polyols are preferably used containing at least one internal EO/PO mixed block and terminal PO block, while for the production of cold-cured moulded foams polyether polyols with a terminal EO/PO mixed block and a proportion of primary OH groups of more than 40 mole %, in particular more than 50 mole %, have proved particularly suitable.

15

1004933-1430

Examples**Production of the DMC catalyst (according to EP-A 700 949).**

- 5 A solution of 12.5 g (91.5 μ mmole) of zinc chloride in 20 ml of distilled water is added while stirring vigorously (24,000 revs/min) to a solution of 4 g (12 mmole) of potassium hexacyanocobaltate in 70 ml of distilled water. Immediately thereafter a mixture of 50 g of tert.-butanol and 50 g of distilled water is added to the resultant suspension and the whole is then vigorously stirred for 10 minutes (24,000 revs/min). A mixture of 1 g of polypropylene glycol with a mean molecular weight
- 10 of 2,000, 1 g of tert.-butanol and 100 g of distilled water is then added and stirred for 3 minutes (1,000 revs/min). The solids are removed by filtration, then stirred for 10 minutes (10,000 revs/min) with a mixture of 70 g of tert.-butanol, 30 g of distilled water and 1 g of the above polyether, and refiltered. Finally, the product is stirred once more (10,000 revs/min) for 10 minutes with a mixture of 100 g of tert.-butanol
- 15 and 0.5 g of the above polyether. After filtration the catalyst is dried to constant weight at 50°C and under normal pressure.

Yield of dried, pulverulent catalyst: 6.23 g

- 20 Elementary analysis and thermogravimetric analysis:
Cobalt = 11.6 wt.%, zinc = 24.6 wt.%, tert.-butanol = 3.0 wt.%, polyether = 25.8 wt.%

Production of polyether polyols

25

Example 1

- 746.7 g of a poly(oxypropylene)triol starter compound (hydroxyl number = 431 mg KOH/g) that had been produced from glycerol and propylene oxide by yttrium triflate catalysis (100 ppm) without separation of the catalyst, and 0.6 g of DMC
- 30 catalyst (100 ppm, referred to the amount of the long-chain polyol to be produced) are placed under a protective gas (nitrogen) in a 10 L capacity glass pressure flask and heated to 105°C while stirring. Propylene oxide (ca. 100 g) is then added in one go until the total pressure has risen to 1.5 bar. Further propylene oxide is then added

only when an accelerated drop in pressure is observed. This accelerated drop in pressure indicates that the catalyst is activated. The residual propylene oxide (3,408.4 g) is then continuously metered in at a constant overall pressure of 1.5 bar. After adding all the propylene oxide and a post-reaction time of 5 hours at 105°C, 5 581.6 g of ethylene oxide and 1,163.2 g of propylene oxide are added in a mixed block at temperatures of 100-110°C. After a post-reaction time of 5 hours volatile fractions are distilled off at 105°C (1 mbar), following which the contents are cooled to room temperature and 6 g of an antioxidant (3,5-ditert.-butyl-4-hydroxytoluene, BHT) are added.

10

The long-chain polyether polyol obtained has an OH number of 54.7 mg KOH/g and a double bond content of 7 mmole/kg.

Example 2

15 As Example 1, but instead using 1,182.0 g of propylene oxide, a mixed block of 581.6 g of ethylene oxide and 2,326.5 g of propylene oxide, and a terminal block of 1,163.2 g of propylene oxide.

20 The product has an OH number of 54.4 mg KOH/g and a double bond content of 8 mmole/kg.

Example 3

872.7 g of a poly(oxypropylene)triol starter compound (hydroxyl number = 380 mg KOH/g) that has been produced by KOH catalysis from TMP and propylene oxide, 25 and 0.3 g of DMC catalyst (50 ppm, referred to the amount of the long-chain polyol to be produced) are added under a protective gas (nitrogen) to a 10 L capacity glass pressure flask and heated to 105°C while stirring. A mixture of propylene oxide (541.3 g) and ethylene oxide (4,586.0 g) is then continuously added at a constant overall pressure of 1.5 bar. After a post-reaction time of 5 hours volatile fractions 30 are distilled off at 105°C (1 mbar), following which the contents are cooled to room temperature and 6 g of an antioxidant (3,5-ditert.-butyl-4-hydroxytoluene, BHT) are added.

The long-chain polyether polyol obtained has an OH number of 58.5 mg KOH/g and a double bond content of 2 mmole/kg.

Example 4

- 5 As Example 3, but with a mixed block consisting of 4,614.6 g of propylene oxide and 512.7 g of ethylene oxide.

The long-chain polyether polyol obtained has an OH number of 58.1 mg KOH/g and a double bond content of 7 mmole/kg.

10

Example 5

As Example 3, but with a mixed block consisting of 3,589.1 g of ethylene oxide and 1,538.2 g of propylene oxide.

- 15 The product has an OH number of 59.1 mg KOH/g and a double bond content of 2 mmole/kg.

Example 6

- 20 As Example 3, but with a mixed block consisting of 1,719.8 g of ethylene oxide and 3,407.4 g of propylene oxide.

The product has an OH number of 58.5 mg KOH/g and a double bond content of 4 mmole/kg.

Comparison Example 1

- 25 746.7 g of a poly(oxypropylene)triol starter compound (hydroxyl number = 431 mg KOH/g) that has been produced from glycerol and propylene oxide by yttrium triflate catalysis (100 ppm) without separation of the catalyst, and 0.6 g of DMC catalyst (100 ppm, referred to the amount of the long-chain polyol to be produced)
- 30 are placed under a protective gas (nitrogen) in a 10 L capacity glass pressure flask and heated to 105°C while stirring. Propylene oxide (ca. 100 g) is then added in one go until the overall pressure has risen to 1.5 bar. Further propylene oxide is then added only when an accelerated drop in pressure is observed. This accelerated drop

in pressure indicates that the catalyst is activated. The residual propylene oxide (5,153.3 g) is then continuously added at a constant overall pressure of 1.5 bar. After adding all the propylene oxide and a post-reaction time of 5 hours at 105°C, volatile fractions are distilled off at 105°C (1 mbar), and the contents are then cooled
5 to room temperature.

The long-chain polyether polyol obtained has an OH number of 54.4 mg KOH/g and a double bond content of 10 mmole/kg.

10 Production of flexible polyurethane foams

Production of the flexible foams:

Free Foam

15

a) Cold-cured moulded foam

The polyol formulation is weighed out according to the formulation instructions on high-speed laboratory scales. In this connection the corresponding polyether (optionally polyether mixture) is added to the conventional laboratory cardboard
20 beaker provided for this purpose and heated to 25°C. After briefly swirling the contents all the necessary additives according to the formulation details are added. After the polyether formulation has been heated to 25°C, the sample is stirred for 30 seconds using an LM-34 stirrer at maximum speed (4,200 revs/min) in order to produce a homogeneous mixture and to ensure a uniform charging with air. In this
25 connection care should be taken to ensure that the stirrer tray does not touch the sheet metal floor of the vessel.

The isocyanate/isocyanate mixture heated to 25°C is weighed out according to the quantitative instructions on high-speed laboratory scales and added to a suitable
30 beaker. The thus previously prepared quantity of isocyanate is added to the reaction vessel together with the polyether formulation. In this connection care should be taken to ensure that the outflow time of the isocyanate component is about 3 seconds. The components are then stirred in the reaction vessel by means of an LM-

34 stirrer at 4,200 revs/min. When the mixture has assumed a creamy consistency (starts to rise), part of the reaction mixture is immediately transferred to a small paper packet stabilised by means of a wooden box.

5 **Starting time** is the period from the beginning of the mixing stage up to the clearly recognisable start of the reaction.

The **setting time** ("thread drawing time") is a measure of the polymer formation reaction, and is determined by repeatedly inserting a thin round wooden rod into the rising reaction mixture shortly before the expected setting time (empirical value). The time period from the start of mixing up to the time at which threads (TDI or
10 TDI/MDI systems) or pocks (MDI systems) form or remain hanging when the round wooden rod is withdrawn, is taken as the setting time.

The **rise time** is understood to be the time period between the start of mixing and the maximum vertical foam height.

15 b) Hot-cured foam

Polyether, water, activator and stabiliser are mixed for 30 seconds (LM-34 stirrer, 4,200 revs/min), following which the crosslinking agent (tin octoate SO) is weighed out and mixed with the reaction mixture. The calculated quantity of isocyanate is then added to the reaction vessel together with the polyether formulation. In this
20 connection care should be taken to ensure that the outflow time of the isocyanate component is about 3 secs. The components are then stirred in the reaction vessel with an LM-34 stirrer at 4,200 revs/min.

When the mixture has assumed a creamy consistency (starts to rise), part of the
25 reaction mixture is immediately transferred to a small paper packet stabilised by means of a wooden box.

Starting time is the period from the beginning of the mixing stage up to the clearly recognisable start of the reaction.

Rise time: the term rise time is understood to mean the interval between the start of
30 mixing and the maximum vertical foam height. With hot-cured foams a deflation is also observed.

30 seconds after the end of the rise time the small packet is placed in a cabinet heated at 150°C. Residence time 5 min.

Moulded part (cold-cured moulded foam)

- 5 The reaction mixture is transferred to a mould (mould temperature 50-60°C) that is provided with a commercially available release agent. The mould is closed with a cover and transferred to a press or closeable container in order to counteract the foam pressure and to keep the tool closed. After 5 minutes the cover is removed and the foam is processed by mechanical crushing (for example by hand, with punches or rollers or by pressure reduction) until the foam has an open-cell structure (shrinkage-free).
- 10

Moulded part (hot-cured moulded foam)

- The reaction mixture is transferred to a mould (mould temperature 40-45°C) and the mould is closed with a perforated cover.
- 15

30 seconds after the end of the rise time (deflation) the mould is placed in the heated cabinet at 150°C. Residence time 15 min.

After removal from the heated cabinet the hot mould is sprayed with release agent (Acmos® 32-574, Acmos Chemie GmbH & Co., D-28199 Bremen).

20

Comparison Example 2

- | | |
|----------------------|---|
| 100 parts by weight | of the polyether from Comparison Example 1 |
| 3.0 parts by weight | water |
| 0.5 parts by weight | silicone stabiliser |
| | (OS® 15, Th. Goldschmidt AG, D-45127 Essen) |
| 0.1 parts by weight | N,N'-dimethylethanolamine (DMEA) |
| 0.05 parts by weight | amine catalyst (Niax® A1, Witco Osi) |
| 0.34 parts by weight | tin octoate |
| 35.6 parts by weight | toluylene diisocyanate (65 wt. % 2,4-isomer, |
| | 35 wt.% 2,6-isomer; Desmodur® T 65, Bayer AG) |
- 25
- 30

were thoroughly mixed and foamed to form a foam. The block exhibited a horizontal internal crack that could not be rectified either by varying the tin catalyst (0.24-0.38 part by weight) or by the NCO/OH ratio (characteristic number 102-108).

5 Example 7

	100 parts by weight	of the polyether from Example 4
	4.0 parts by weight	water
	0.4 parts by weight	silicone stabiliser (OS [®] 25, Th. Goldschmidt AG, D-45127 Essen)
10	0.1 parts by weight	DMEA
	0.05 parts by weight	amine catalyst (Niax [®] A1, Witco Osi)
	0.18 parts by weight	tin octoate
	51.2 parts by weight	toluylene diisocyanate (80 wt. % 2,4-isomer, 20 wt.% 2,6-isomer; Desmodur [®] T 80, Bayer AG)

15

were thoroughly mixed and foamed to form a foam block. A crack-free, open foam with a regular cell structure was obtained.

Example 8

20	100 parts by weight	of the polyether from Example 6
	4.0 parts by weight	water
	0.4 parts by weight	silicone stabiliser (OS [®] 25, Th. Goldschmidt AG, D-45127 Essen)
	0.1 parts by weight	DMEA
25	0.05 parts by weight	amine catalyst (Niax [®] A1, Witco Osi)
	0.18 parts by weight	tin octoate
	51.2 parts by weight	Desmodur [®] T 65

were thoroughly mixed and foamed to form a foam block. A crack-free foam having a regular cell structure was obtained.

30

Example 9

In a formulation for producing super-flexible qualities, the polyether from Example 5 was foamed as a mixture with an active conventional polyether:

5	75 parts by weight	of the polyether from Example 5
	25 parts by weight	of a trifunctional polyether with an OH number of 35 mg KOH/g and primary OH groups > 80 mole % (Desmophen [®] 3900 I, Bayer AG)
	3.50 parts by weight	water
10	0.8 parts by weight	silicone stabiliser (OS [®] 15, Th. Goldschmidt AG, D-45127 Essen)
	0.7 parts by weight	DMEA
	0.25 part by weight	amine catalyst (catalyst 33LV from Air Products GmbH, D-45527 Hattingen)
15	2.0 parts by weight	TCPP (trichloropropyl phosphate)
	45.4 parts by weight	Desmodur [®] T 80

were thoroughly mixed and foamed to form a foam block. A very flexible, elastic, crack-free foam with a regular cell structure was obtained.

Example 10

20	100 parts by weight	of the polyether from Example 2
	3.0 parts by weight	water
	0.8 parts by weight	silicone stabiliser (OS [®] 22, Th. Goldschmidt AG, D-45127 Essen)
25	0.1 parts by weight	DMEA
	0.05 parts by weight	amine catalyst (Niax [®] A1, Witco Osi)
	0.18 parts by weight	tin octoate
	40.5 parts by weight	Desmodur [®] T 80

were thoroughly mixed and foamed to form a foam block. A crack-free foam was obtained.

Example 11 (cold-cured free foam)**Formulation:**

	50.0 parts by weight	of the polyether from Example 1
5	50.0 parts by weight	of a trifunctional polyether with an OH number of 28 mg KOH/g and > 80 mole % of primary OH groups (Desmophen [®] VP PU 10WF22, Bayer AG)
	3.6 parts by weight	water
	0.15 parts by weight	amine catalyst (Niax [®] A1, Witco Osi)
10	0.4 parts by weight	amine catalyst (catalyst 33LV from Air Products GmbH, D-45527 Hattingen)
	1.25 parts by weight	diethanolamine
	0.50 parts by weight	silicone stabiliser (Tegostab [®] B 8708, Th. Goldschmidt AG, D-45127 Essen)
15	62.8 parts by weight	high monomer content 4,4'-diphenylmethane diisocyanate with polymer fractions and an NCO content of 32.3 wt.% (VP PU Desmodur [®] 3230, Bayer AG)

A high quality free foam was obtained.

20

Example 12 (hot- cured moulded foam)**Formulation:**

	100.0 parts by weight	of the polyether from Example 2
	3.5 parts by weight	water
25	0.05 parts by weight	tin octoate
	0.15 parts by weight	amine catalyst (Niax [®] A1, Witco Osi)
	1.0 parts by weight	silicone stabiliser (Tegostab [®] B 4900, Th. Goldschmidt AG, D-45127 Essen)
30	62.8 parts by weight	Desmodur [®] T 80

A high quality moulded foam was obtained. In order to determine the air permeability of the foam, its flow resistance to an air stream was measured with the apparatus illustrated in Figs. 1-3.

- 5 The apparatus consists of a glass cylinder graduated in millimetres from 0 to 350, whose internal diameter is 36 mm, and an inner tube of 7 mm internal diameter. This inner tube terminates at the top in a T-piece, to one side of which is connected an air supply and to the other side of which is connected a hose with a measuring head. The hose for the measuring head has an internal diameter of 12 mm and a
10 length of 1.80 m. The glass cylinder is closed at the bottom and can be filled with water via a funnel connected at the rear. The test equipment is connected via two stopcocks, a pressure-reducing valve and a hose of suitable length and suitable diameter to a compressed air source, the pressure-reducing valve being adjusted to ca. 2.0 bar. The glass vessel is filled with distilled water until the lower edge of the
15 meniscus reaches the H₂O-hour mark. Stopcock 1 is then turned and the flow rate at stopcock 2 is altered until the lower edge of the meniscus of the inner column reaches the 0 mm mark, indicating that a preliminary pressure of 100 mm water column has been set. After the setting of the preliminary pressure the measuring head is placed without pressure on the sample and the height of the water column in
20 the inner tube is then read off. This is equal to the flow resistance of the sample.

The following values were determined: flow resistance of the foam core: 100 mm water column; flow resistance of the foam plus skin: 300 mm water column.

25 Example 13 (hot-cured moulded foam)

Formulation

	100 parts by weight	of the polyether from Example 1
	3.5 parts by weight	water
	0.15 parts by weight	amine catalyst (Niax [®] A1, Witco Osi)
30	0.10 parts by weight	tin octoate
	0.50 parts by weight	silicone stabiliser
		(Tegostab [®] B 4900, Th. Goldschmidt AG, D-45127 Essen)

40.6 parts by weight Desmodur® T 80

A high quality moulded foam was obtained. The flow resistance of the sample was determined according to the procedure described in Example 12. The following
 5 values were measured: flow resistance of the foam core: 50 mm water column; flow resistance of the foam plus skin: 160 mm water column.

Example 14 (hot- cured moulded foam)

	30.0 parts by weight	of the polyether from Example 1
10	70.0 parts by weight	Desmophen® 3426 L
	3.5 parts by weight	water
	0.09 parts by weight	tin octoate
	1.00 parts by weight	silicone stabiliser
		(Tegostab® B 4900, Th. Goldschmidt AG, D-45127 Essen)
15	40.6 parts by weight	Desmodur® T 80

A high quality moulded foam was obtained.

Patent claims

1. Flexible polyurethane foam obtainable by reacting polyisocyanates and polyether polyols produced by DMC catalysis, that contain at least one ethylene oxide/propylene oxide mixed block and that have a number average molecular weight between 700 and 50,000 g/mole.
5
2. Flexible polyurethane foam according to claim 1, characterised in that for its production a polyether polyol produced by DMC catalysis is used, which contains a terminal propylene oxide block.
10
3. Flexible polyurethane foam according to claim 2, characterised in that it is a hot-cured moulded foam.
- 15 4. Flexible polyurethane foam according to claim 2, characterised in that it is a block foam.
5. Polyurethane block foam according to claim 4, characterised in that the ethylene oxide/propylene oxide mixed blocks of the polyether polyol used for its production and produced by DMC catalysis consist in a quantity of at least 50 mole % of polyoxypropylene units.
20
6. Flexible polyurethane foam according to claim 1, characterised in that in its production a polyether polyol produced by DMC catalysis is used that has a terminal EO/PO mixed block and a proportion of primary OH groups of more than 40 mole %.
25
7. Flexible polyurethane foam according to claim 6, characterised in that it is a cold-cured moulded foam.
30
8. Flexible polyurethane foam according to claim 6, characterised in that it is a super flexible block foam.

9. Process for the production of flexible polyurethane foams in which polyisocyanates are reacted with polyether polyols produced by DMC catalysis, that contain at least one ethylene oxide/propylene oxide mixed block and that have a number average molecular weight between 700 and 50,000 g/mole.
5
10. Use of a polyether polyol produced by DMC catalysis that contains at least one ethylene oxide/propylene oxide mixed block and that has a number average molecular weight between 700 and 50,000 g/mole, for the production of flexible polyurethane foams.
10

Fig. 1

Flow resistance measurement apparatus

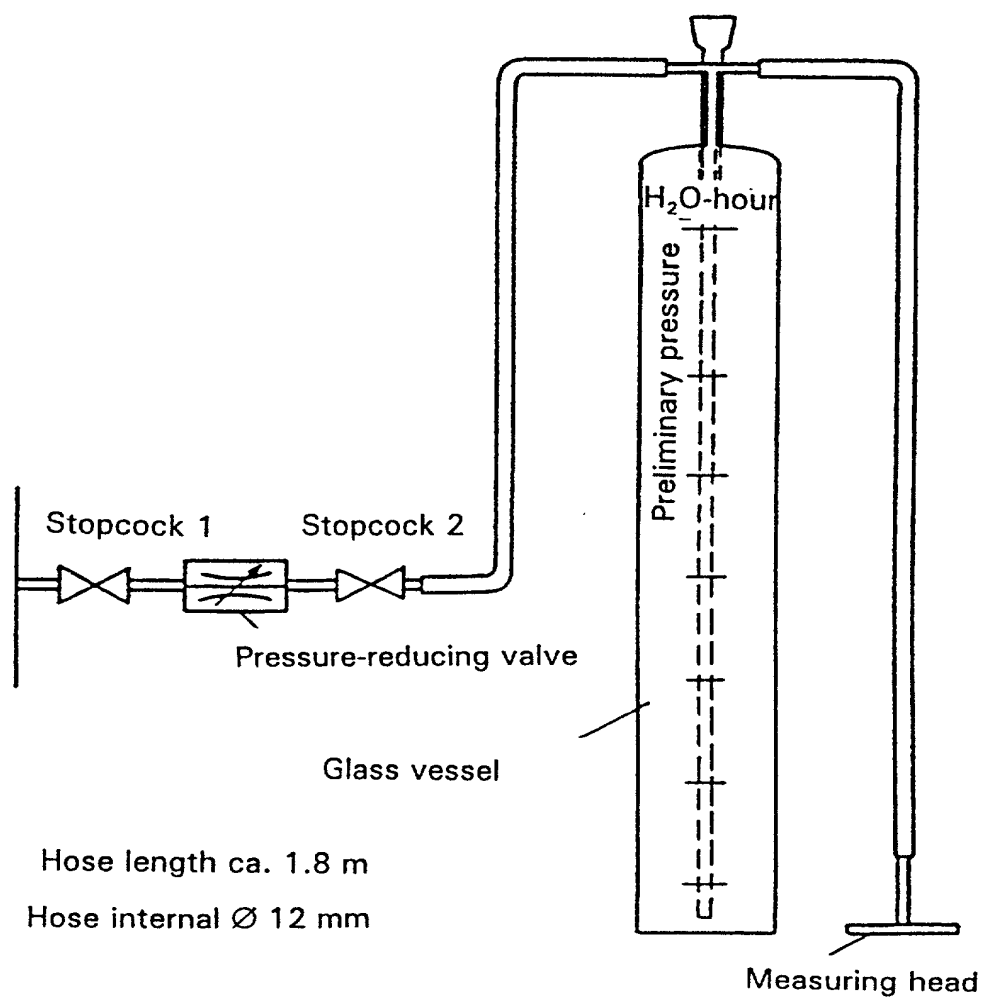


Fig. 2

Glass vessel for flow resistance measurement apparatus


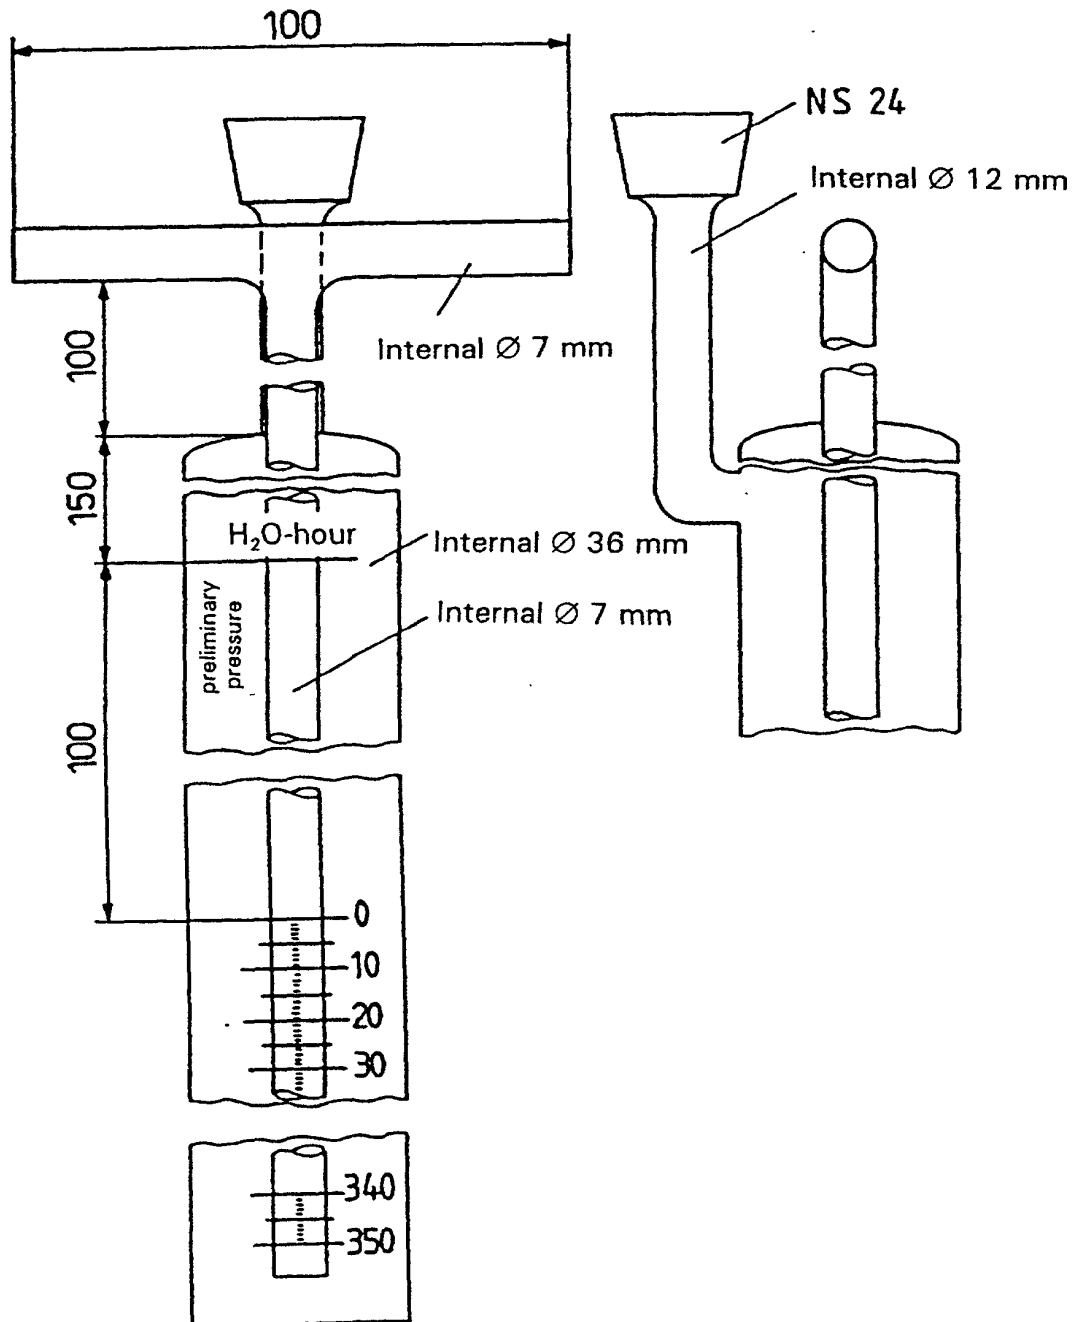


Fig. 3

Measuring head for flow resistance measurement apparatus

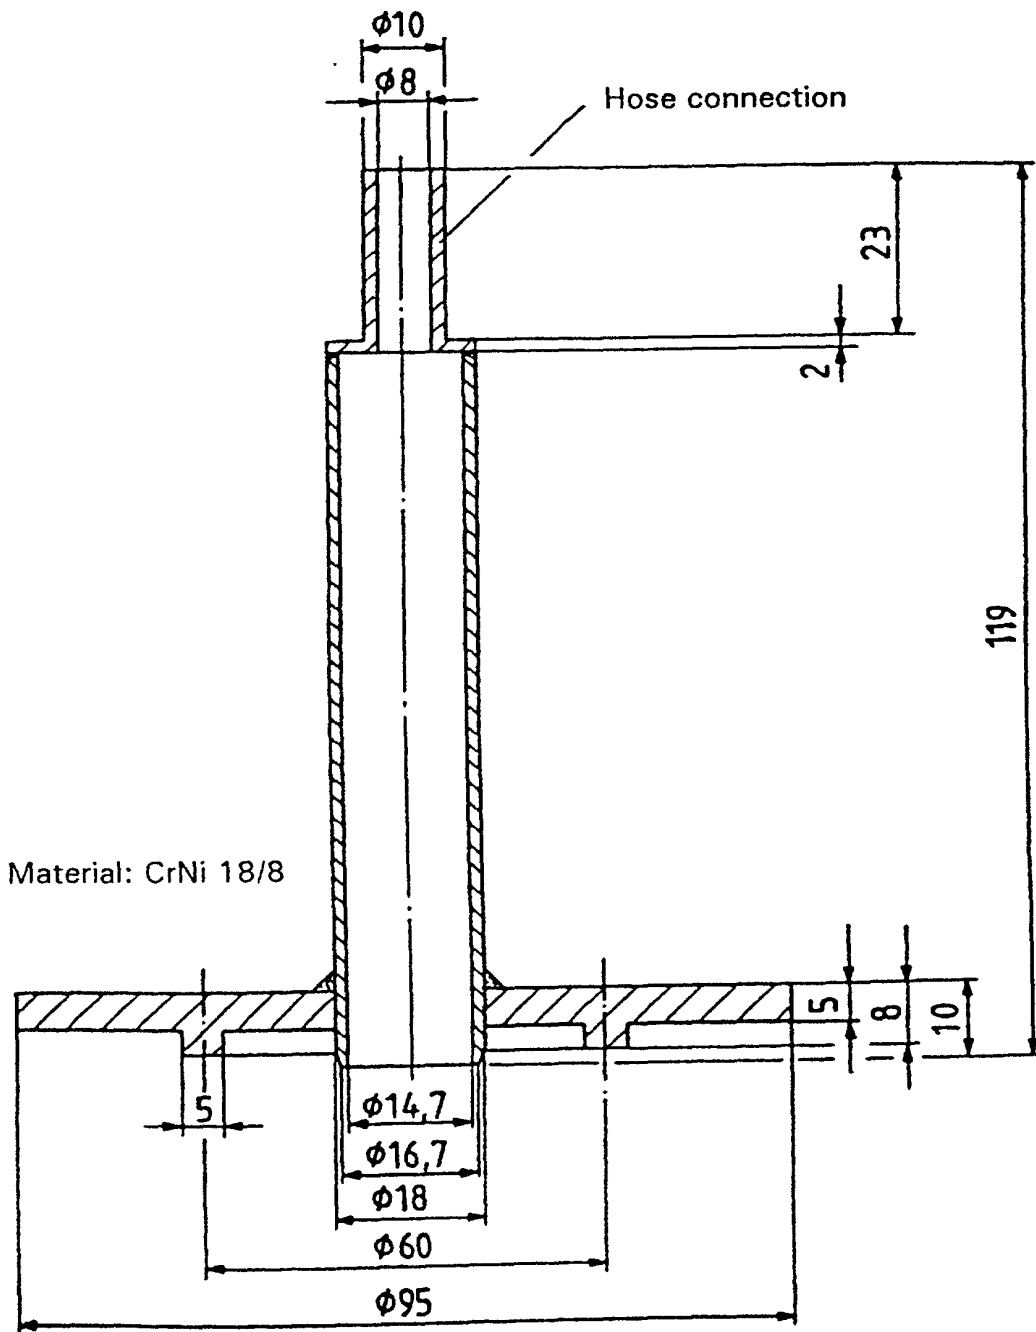

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought

on the invention entitled

HIGH-RESILIENT POLYURETHANE FOAMS PRODUCED FROM POLYETHER POLYOLS

the specification of which is attached hereto,

or was filed on **June 6, 2000**

as a PCT Application Serial No. **PCT/EP00/05167**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s), the priority(ies) of which is/are to be claimed:

199 28 156.4
(Number)

Germany
(Country)

June 19, 1999
(Month/Day/Year Filed)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose the material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and this application and to transact all business in the Patent and Trademark Office

~~JOSEPH C. GIL~~, Patent Office Registration Number ~~26,602~~ ARON PREIS, Patent Office Registration Number ~~29,426~~
~~LYNDANNE M. WHALEN~~, Patent Office Registration Number ~~29,457~~ THOMAS W. ROY,
Patent Office Registration Number ~~29,582~~ RICHARD E. L. HENDERSON, Patent Office Registration Number ~~31,619~~
GODFRIED R. AKORLI, Patent Office Registration Number ~~28,779~~ N. DENISE BROWN, Patent Office
Registration Number ~~36,097~~ NOLAND J. CHEUNG, Patent Office Registration Number ~~39,138~~
DIDERICO VAN EYL, Patent Office Registration Number ~~38,641~~ CAROLYN M. SLOANE, Patent Office
Registration Number ~~44,339~~ JAMES R. FRANKS, Patent Office Registration Number ~~42,552~~
JACKIE ANN ZURCHER, Patent Office Registration Number ~~42,251~~
RAYMOND J. HARMUTH, Patent Office Registration Number ~~33,896~~ 13

all of Bayer Corporation, Pittsburgh, Pennsylvania 15205-9741

Send Correspondence To: Direct Telephone Calls To:

Patent Department

Bayer Corporation (412) 777-2349

100 Bayer Road

Pittsburgh, Pennsylvania 15205-9741

FULL NAME OF SOLE OR FIRST INVENTOR Jörg Hofmann		INVENTOR'S SIGNATURE <i>Jörg Hofmann</i>	DATE 07-10-09
RESIDENCE D 47829 Krefeld, Germany		CITIZENSHIP German	
POST OFFICE ADDRESS c/o Bayer Aktiengesellschaft, D 51368 Leverkusen, Germany			
FULL NAME OF SECOND INVENTOR Pramod Gupta		INVENTOR'S SIGNATURE <i>Pramod Gupta</i>	DATE 19.10.01
RESIDENCE D 50181 Bedburg, Germany		CITIZENSHIP German	
POST OFFICE ADDRESS Kardinal-Frings-Str. 20 A, D 50181 Bedburg, Germany			
FULL NAME OF THIRD INVENTOR Manfred Dietrich		INVENTOR'S SIGNATURE <i>Manfred Dietrich</i>	DATE 31.10.01
RESIDENCE D 60599 Frankfurt, Germany		CITIZENSHIP German	
POST OFFICE ADDRESS Wasserhofstr. 1/1, D 60599 Frankfurt, Germany			
FULL NAME OF FOURTH INVENTOR Hansjürgen Rabe		INVENTOR'S SIGNATURE <i>Hansjürgen Rabe</i>	DATE 26.10.09
RESIDENCE D 51381 Leverkusen, Germany		CITIZENSHIP German	
POST OFFICE ADDRESS Domblick 20, D 51381 Leverkusen, Germany			
FULL NAME OF FIFTH INVENTOR Jürgen Grönen		INVENTOR'S SIGNATURE <i>Jürgen Grönen</i>	DATE 2001-10-05
RESIDENCE D 51491 Overath, Germany		CITIZENSHIP German	
POST OFFICE ADDRESS c/o Bayer Aktiengesellschaft, D 51368 Leverkusen, Germany			
FULL NAME OF SIXTH INVENTOR Pieter Ooms		INVENTOR'S SIGNATURE <i>Pieter Ooms</i>	DATE 10/10/2001
RESIDENCE D 47800 Krefeld, Germany		CITIZENSHIP Dutch	
POST OFFICE ADDRESS c/o Bayer Aktiengesellschaft, D 51368 Leverkusen, Germany			
FULL NAME OF SEVENTH INVENTOR		INVENTOR'S SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			